

SCALE 1/1

## Specification :



### Material :

1. Housing : ABS, UL 94V-0, Outward Matt, Grey Color.
2. IDC
  - 2-1 IDC Housing : Polycarbonate, UL 94V-2, KRONE dual.
  - 2-2 IDC Terminal material & finished : Phosphor Bronze with 50-60 micro-inch Tin-Lead plated.
3. Molding Type : Narrow Molded, PVC 70P, Grey Color.
4. Cable : CAT.5e Unshielded Twisted Pair, 24AWG Stranded conductor, PVC Jacket with Grey Color.
5. RJ45 Plug :
  - 5-1. Housing & Insert : Polycarbonate, UL 94V-2, Transparence color.
  - 5-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
  - 5-3. Contact finished : min. 50 micro-inch Gold plated on contact area.


### Wiring information

PLUG T568B		KEYSTONE T568B	
COLOR CODE		COLOR CODE	
WHITE/ORANG	PIN.1	WHITE/ORANGE	PIN.1
ORANG	PIN.2	ORANGE	PIN.2
WHITE/GREEN	PIN.3	WHITE/GREEN	PIN.3
BLUE	PIN.4	BLUE	PIN.4
WHITE/BLUE	PIN.5	WHITE/BLUE	PIN.5
GREEN	PIN.6	GREEN	PIN.6
WHITE/BROWN	PIN.7	WHITE/BROWN	PIN.7
BROWN	PIN.8	BROWN	PIN.8


Part No.	Length	Part No.	Length
1963-0.5	0.5M	1963-8	8M
1963-1	1M	1963-10	10M
1963-2	2M	1963-15	15M
1963-3	3M	1963-20	20M
1963-5	5M	1963-30	30M

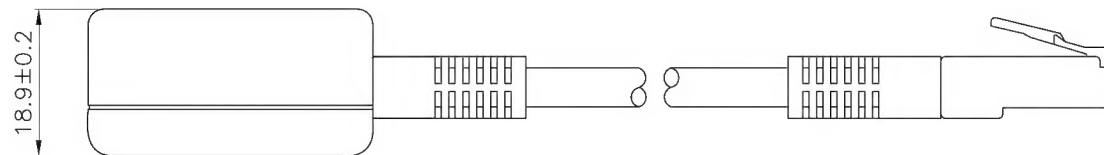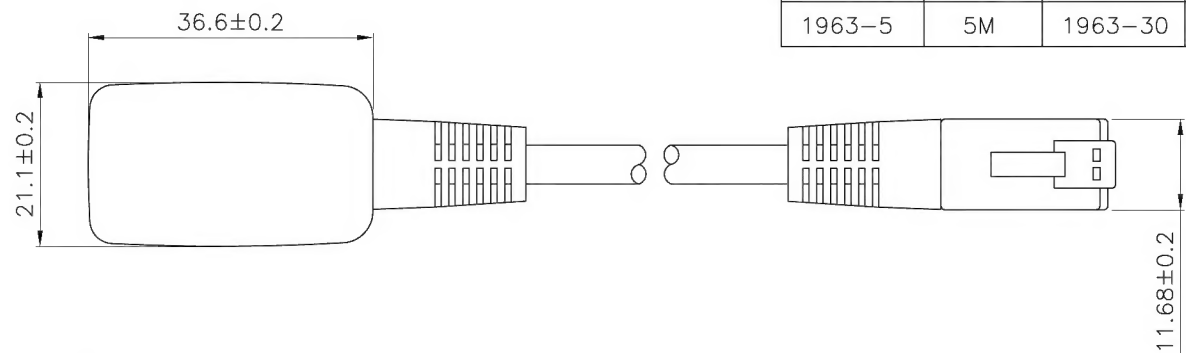

11.68±0.2

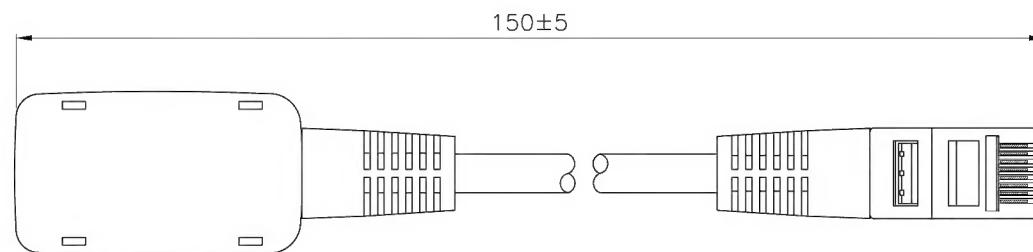

**RoHS Compliant**

	DSGN	CSQ	01.JUN.2007	ITEM NO:  1963	
	CHK	Maer	01.JUN.2007		
	UNIT M/M	APPR	Yty	01.JUN.2007	CAT.5E Adaptor, Male to Female
	SCALE 1/1	<b>Videk Ltd</b>			
DWG NO: 1963					